


Rocker Switches



21 x 15 mm SP Rocker Switches 35

RK4 Series



Rocker Switches

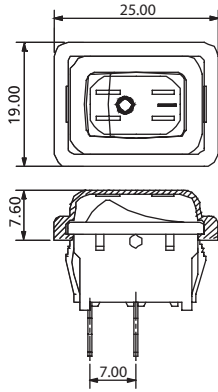



RK4S1Q4D_ _ _ _

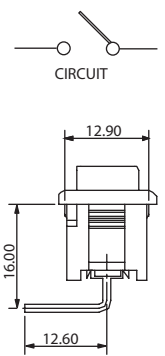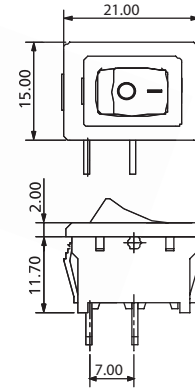

RK4S1R4D_ _ _ _


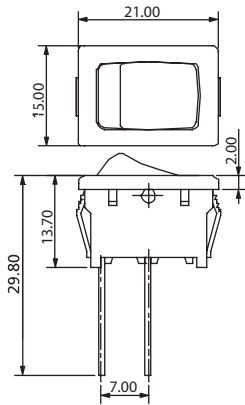


RK4S1H4A_ _ _ _

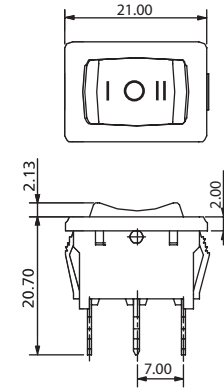


RK4S3Q4G_ _ _ _

TERMINAL




ACTUATOR MARKING



PANEL SIZE

PANEL CUT-OUT
Snap-in mounting



Note: The described Front Panel Mounting Hole is a proposal only and not universally valid. We recommend that customers test the applicability of the Front Panel Mounting Hole with switch samples and define the fitting Front Panel Mounting Hole measurements individually.

How to order:

RK4

- | | |
|---|--|
| <p>1 POLES:
S Single Pole</p> <p>2 SWITCHING:
1 ON - OFF
2 ON - ON
3 ON - OFF - ON
4 MOM - OFF</p> <p>3 TERMINAL (See above drawings):
Q 4.8mm TAB, 0.8mm THICK
D1 Solder Tag Type 1
D2 Solder Tag Type 2
D3 Solder Tag Type 3
R Thru Hole Right Angle
L Thru Hole Left Angle
H Thru Hole Straight</p> <p>4 ACTUATOR:
4 Curve</p> | <p>5 ACTUATOR MARKING:
A See above drawings
B See above drawings
C See above drawings
D See above drawings
E See above drawings
F See above drawings
G See above drawings</p> <p>6 BASE COLOR:
A Black
H Grey
B White</p> <p>7 ACTUATOR COLOR:
A Black
H Grey
B White
C Red</p> <p>8 WATERPROOF COVER:
N None Cover (Standard)
W With Waterproof Cover</p> |
|---|--|

General Specifications:

FEATURES

- » Single pole rocker switch up to 20A 125VAC
- » Non illuminated

MATERIALS

- » Contact Arm: Silver cadmium alloy
- » Terminals: Silver plated copper
- » Spring: Piano wire

MECHANICAL

- » Temperature Range: -20°C to +125°C

ELECTRICAL

- » Electrical Life: 10,000 cycles
- » Rating: 20A125VAC, 12A250VAC
10A125VAC, 6A250VAC
6A125VAC, 3A250VAC
6A250VAC
10(4)A250VAC~T125
- » Initial Contact Resistance: 20m Ω max.
- » Insulation Resistance: 100M Ω min. at 500VDC