

Detector Switches

Vertical Detector Switches Uplift Type

DF65 Series

General Specifications

MATERIALS



- » Cover : Nickel Silver
- » Contact : Alloy Copper , gold plated
- » Terminal : Brass , gold plated
- » Base : UL94V-0 PA9T High-Temp Thermoplastic black
- » Stem : UL94V-0 PA9T High-Temp Thermoplastic black
- » Contact Arrangement: 1pole 1throw
- » Silicone : Silicone black

MECHANICAL

- » Mechanical Life: 50,000 operations
- » Operation Force: 40gf max.
- » Operation Temperature : -10°C to +60°C
- » Storage Temperature : -20°C to +70°C

ELECTRICAL

- » Electrical Life : 50,000 cycles
- » Rating : 50 mA 3 V DC to 10 mA 5 V DC
- » Dielectric Strength : 100 VAC / 1 minute.
- » Contact Resistance : 1Ω Max.
- » Insulation Resistance : 100 MΩ Min. 100V DC

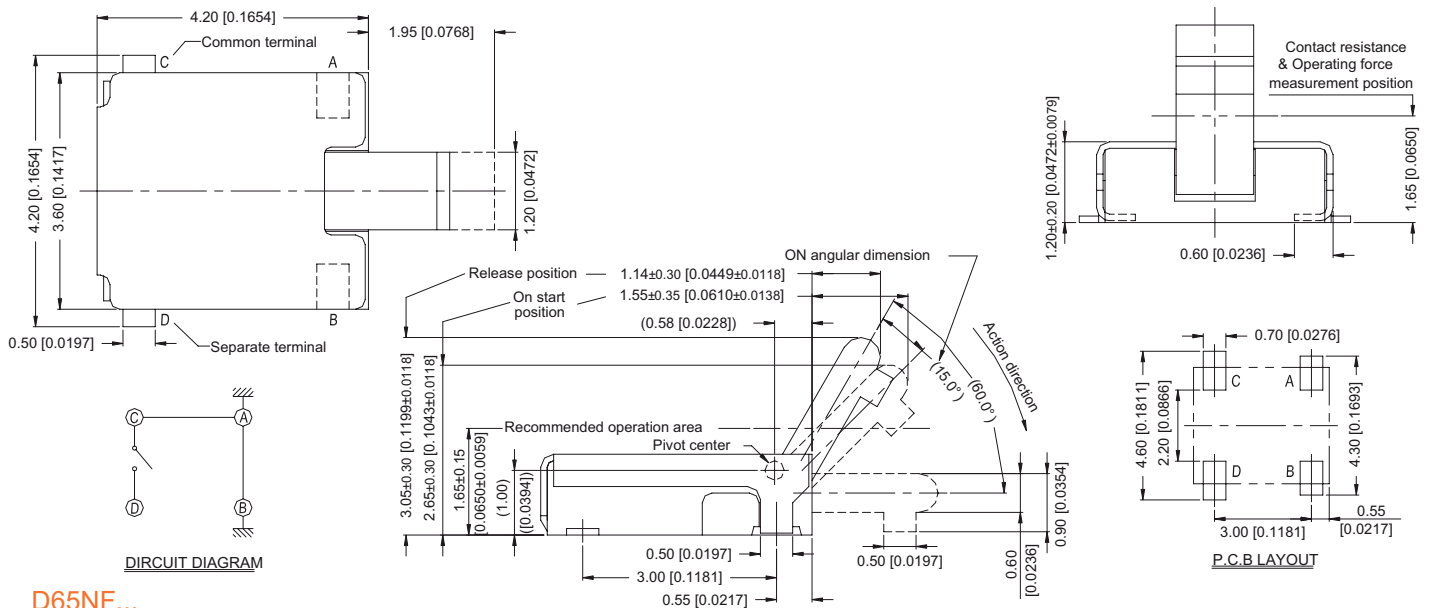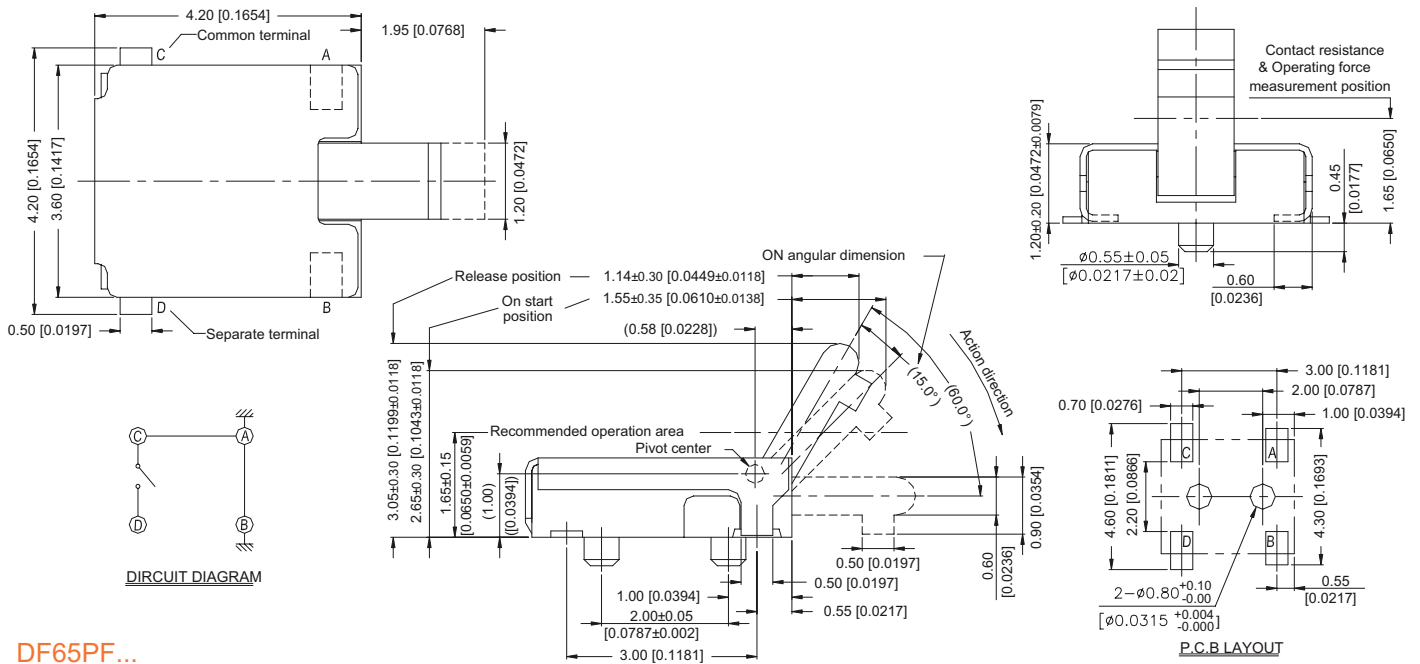

How to order:

DF65 1 2 3

- | | | |
|----------------|---------------------|-------------------------|
| 1 POST: | 2 TERMINALS: | 3 PACKAGE STYLE: |
| N Without Post | F Flat Terminal | TR Tape & Reel |
| P With Post | L Bending Terminal | |

General Tolerance: ± 0.2 mm