


Rocker Switches


21 x 15 mm Rocker Switches

RK2 Series

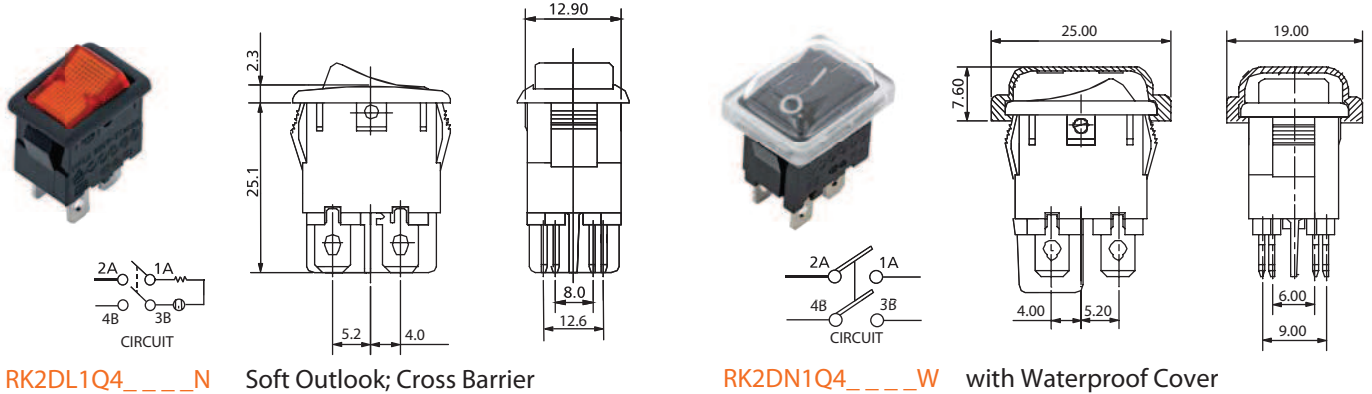

RK2DL1Q4___N Soft Outlook; Cross Barrier

RK2DN1Q4___W with Waterproof Cover

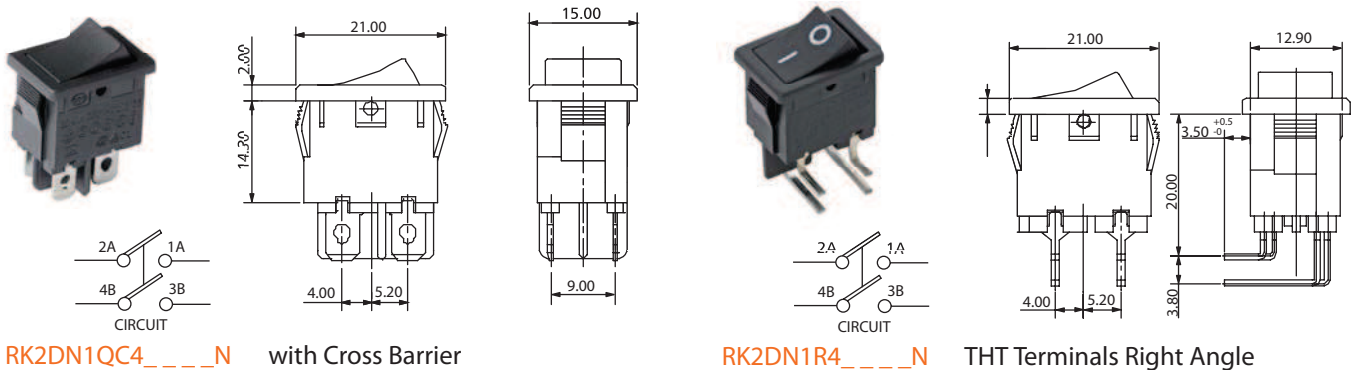

RK2DN1QC4___N with Cross Barrier

RK2DN1R4___N THT Terminals Right Angle

TERMINAL	ACTUATOR	ACTUATOR MARKING	PANEL SIZE
Q 4.8mm TAB, 0.8mm Thick D Solder Tag R Thru Hole Right Angle H Thru Hole Straight	4 Curve SIZE 	A B OFF ON C D E F	PANEL CUT-OUT Snap-in mounting

Note: The described Front Panel Mounting Hole is a proposal only and not universally valid. We recommend that customers test the applicability of the Front Panel Mounting Hole with switch samples and define the fitting Front Panel Mounting Hole measurements individually.

How to order:

RK2

- 1 POLES:**
S Single Pole (SP)
D Double Poles (DP)
- 2 ILLUMINATION:**
N No illuminated
L Illuminated
- 3 SWITCHING:**
1 ON - OFF
- 4 TERMINAL (See above drawings):**
Q 4.8mm TAB, 0.8mm THICK
QC 4.8mm TAB, 0.8mm THICK with Cross Barrier
D Solder Tag
R Thru Hole Right Angle
H Thru Hole Straight
- 5 ACTUATOR (See above drawings):**
4 Curve
- 6 ACTUATOR MARKING:**
A See above drawings
B See above drawings
C See above drawings
D See above drawings
E See above drawings
F See above drawings
- 7 BASE COLOR:**
A Black
H Grey
B White
- 8 ACTUATOR COLOR:**
A Black H Grey B White
F Green D Orange C Red
E Yellow
- 9 WATERPROOF COVER:**
N None Cover (Standard)
W With Waterproof Cover

General Specifications:

- FEATURES**
- » Single & double poles rocker switch up to 10(4)A 250VAC
- MATERIALS**
- » Movable Contact Arm: Phosphorus bronze
 - » Contact: Silver alloy
 - » Terminal: Silver plated copper
- MECHANICAL**
- » Temperature Range: -20°C to +125°C
- ELECTRICAL**
- » Electrical Life: 10,000 cycles
 - » Rating: 12A125VAC, 10A250VAC 1/4HP
10A125VAC, 8A250VAC 1/4HP
10A250VAC
10(4)A250V~T125/55
 - » Initial Contact Resistance: 20m Ω max.
 - » Insulation Resistance: 100M Ω min. at 500VDC